


Stock Picker 47 compact, safe and versatile for working at heights of up to 4.60m.

**Stock Picker 47PICKING**



Ascent and descent with maximum simplicity and safety

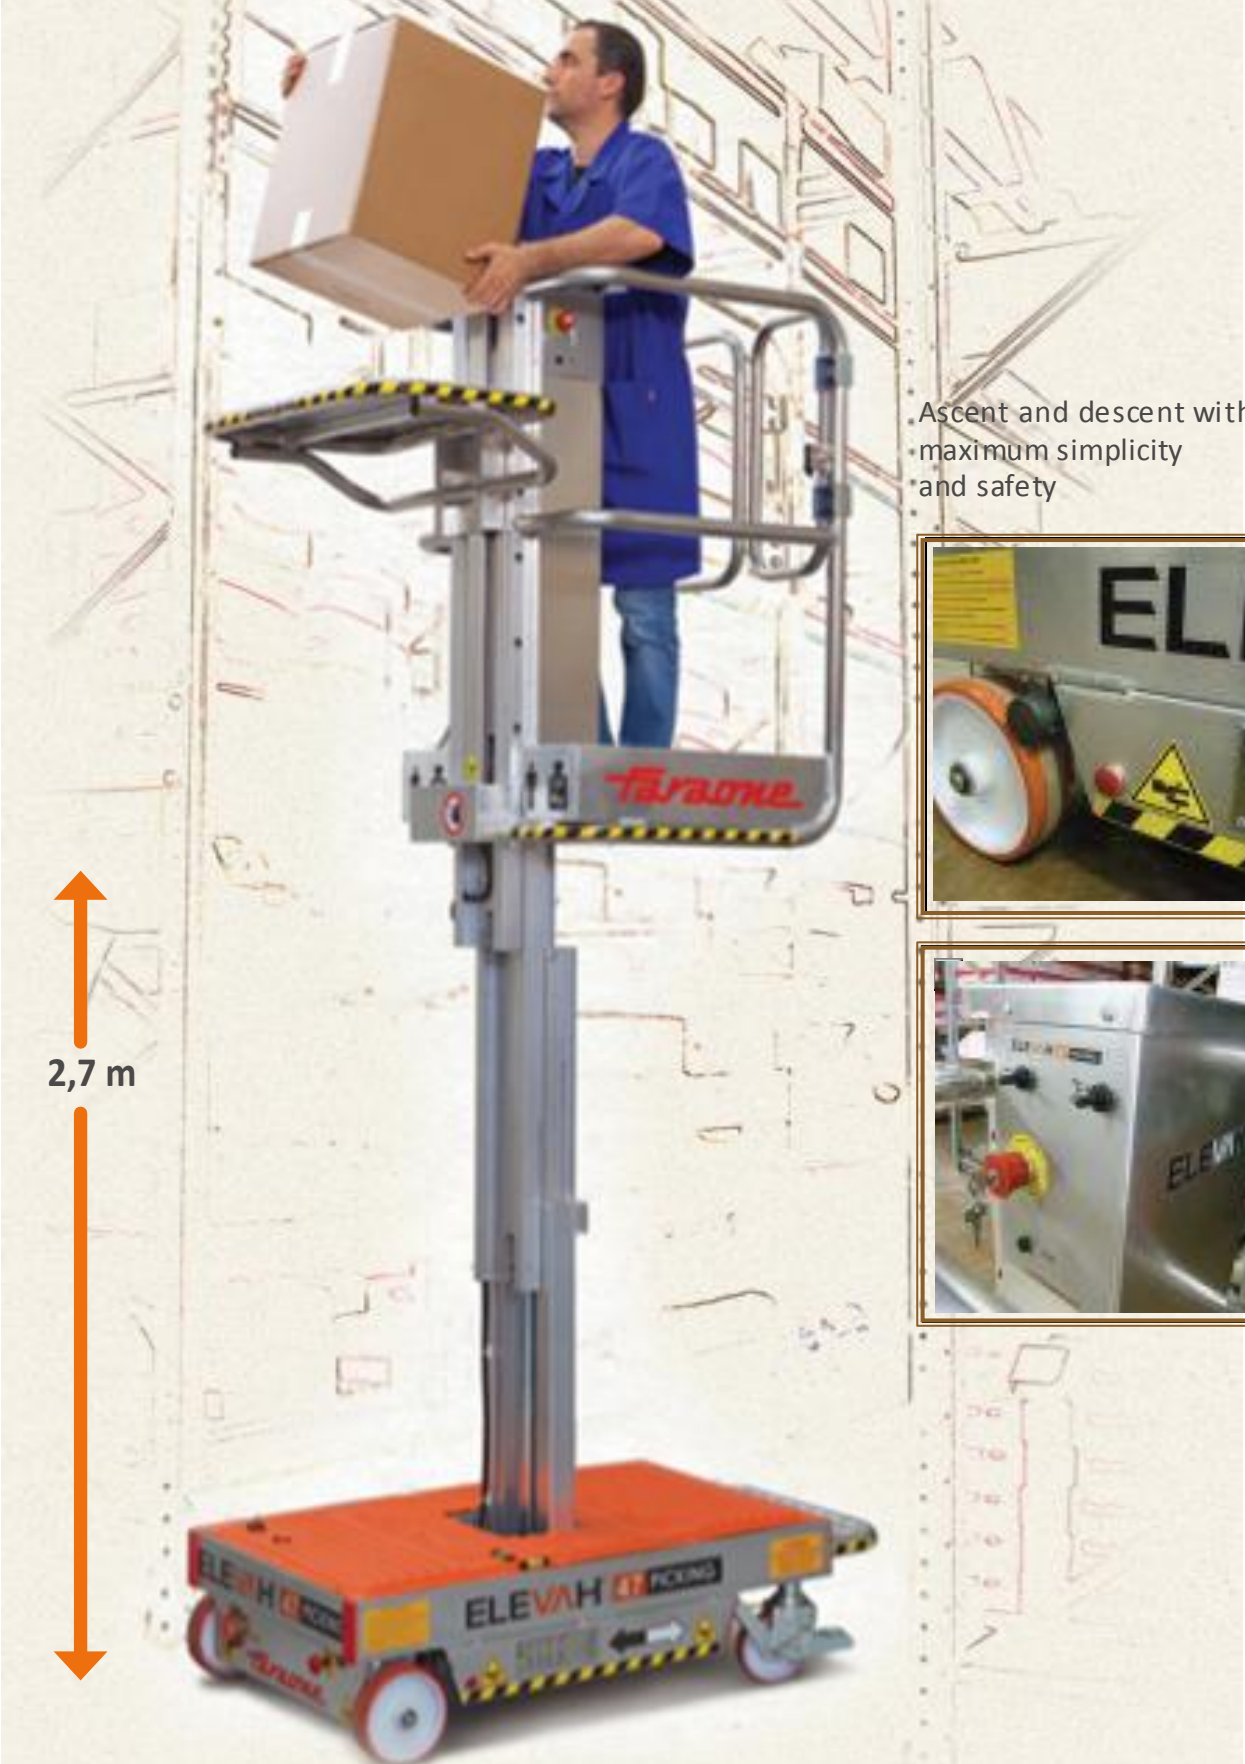

↑  
2,7 m  
↓

**PICKINGTRUCKS**



PRACTICAL AND EASY TO HANDLE.

COMPLETELY ALUMINUM

With its 260 kg weight and a payload capacity of 200 kg, Elevah 47 combines safety with practicality, ensuring high performance and ease of use (maximum thrust 8 kg).



### ERGONOMIC ACCESS

The operator can step on board easily thanks to the simple cage opening mechanism.






### PRACTICAL PICKING PLATFORM

There is a large loading platform which can be adjusted automatically when raised.

### Technical data

|                                    |   |         |
|------------------------------------|---|---------|
| <b>Max capacity</b>                | 200 kg  |         |
| <b>Number of people</b>            | 1   |         |
| <b>Use</b>                         | internal  |         |
| <b>A</b>                           | Closed machine height                             | 1620 mm |
| <b>B</b>                           | Min. height from the ground to the platform level | 395 mm  |
| <b>C</b>                           | Height from the ground to the platform level      | 830 mm  |
| <b>D</b>                           | Picking plate stroke                              | 760 mm  |
| <b>E</b>                           | Max. height from the ground to the platform level | 2700 mm |
| <b>F</b>                           | Max. picking from the ground                      | 3880 mm |
| <b>G</b>                           | Cage inner dimensions                             | 620 mm  |
| <b>H</b>                           |   | 560 mm  |
| <b>I</b>                           | Picking platform dimensions                       | 470 mm  |
| <b>K</b>                           |   | 770 mm  |
| <b>L</b>                           | Base overall dimensions                           | 780 mm  |
| <b>M</b>                           |   | 1373 mm |
| <b>Picking platform capacity</b>   | 80 kg   |         |
| <b>Machine weight</b>              | 260 kg  |         |
| <b>Power supply</b>                | 24 V  |         |
| <b>N° 2 12V AGM Batteries</b>      | 45 Ah   |         |
| <b>Battery charger</b>             | 110V - 220V                                       |         |
| <b>Drive wheels dimension</b>      | Ø 150 x 45  |         |
| <b>Swivel wheels dimensions</b>    | Ø 200 x 50  |         |
| <b>Maximum rising speed</b>        | 0,20 m/s  |         |
| <b>Maximum descending speed</b>    | 0,15 m/s  |         |
| <b>Manual force to move it</b>     | 8 kg  |         |
| <b>Manual force once in motion</b> | 5 kg  |         |
| <b>N</b>                           | Maximum pressure for wheel at full load*          | 1,60 kN |

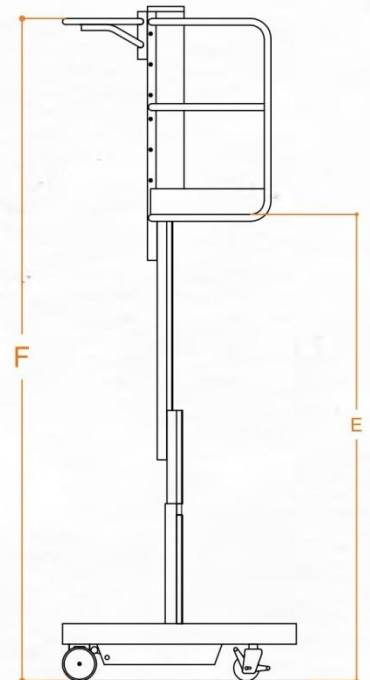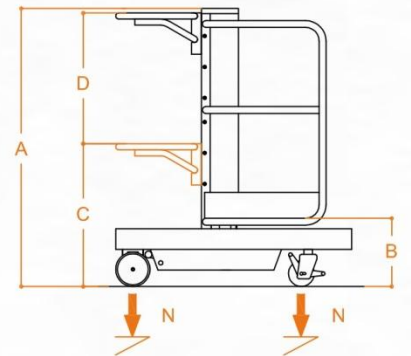

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).