


Stock Pick 61

MANUAL DRIVE

Stock Picker 61 is a fast, safe and economical alternative to traditional scaffolding.

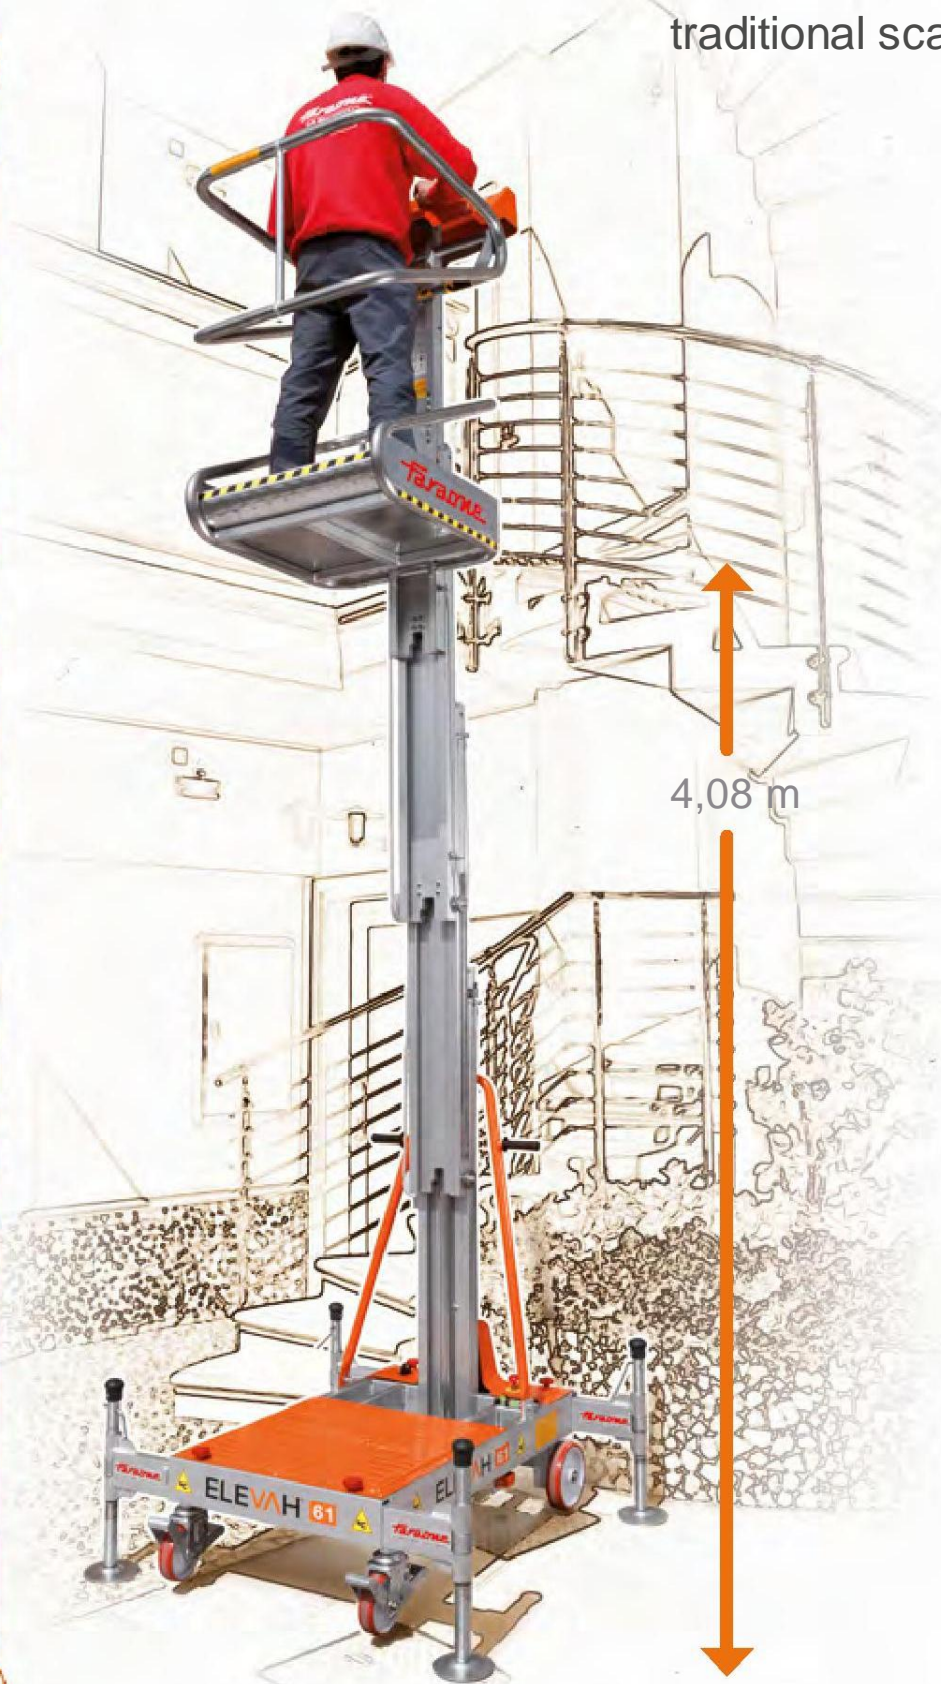

4,08 m



EASY TO HANDLE

Thanks to its low weight it can be easily moved (maximum thrust required: 5kg)

MAXIMUM WORKING HEIGHT OF 6,1 M. (WITH STABILIZERS),
3,9 M (WITHOUT STABILIZERS)

www.cherrypicker.ie | +353 1 835 4788



SAFETY AT HEIGHT

It can be used without stabilizers up to a working height of 3.9 m.



Stock Picker61

SUITABLE FOR EVERY SITUATION




This machine can be leveled manually using stabilizers.



Technical data

Stock Picker61

Max capacity		200 kg	200 kg
Number of people		1	1
Use		internal	external
Description		Without Stabilizers	With Stabilizers
A	Closed machine height	1730 mm	
B	Min. height from the ground to the platform level	400 mm	
C	Max. height from the ground to the platform level	1895 mm	4085 mm
D	Base overall dimensions	1187 mm	1297 mm
E		770 mm	1252 mm
F	Cage inner dimensions	638 mm	
G		620 mm	
H	Max. distance from the wall	0 mm	275 mm
I		0 mm	30 mm
J	Storage tray	620 mm	
K		230 mm	
Capacity of storage tray		20 kg	
Machine weight		219 kg	237 kg
Power supply		24 V	
N° 2 AGM 12 V Batteries		45 Ah	
Battery charger		110V - 220V	
Swivel wheels dimensions		Ø 220 x 50	
Drive wheels dimension		Ø 150 x 45	
Maximum rising speed		0,16 m/s	
Maximum descending speed		0,21 m/s	
Manual force to move it		7 kg	
Manual force once in motion		3 kg	
L	Maximum pressure for wheel at full load*	1,47 kN	-
	Maximum pressure for stabilizer at full load *	-	1,53 kN

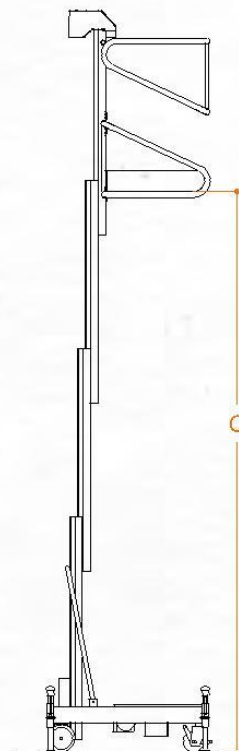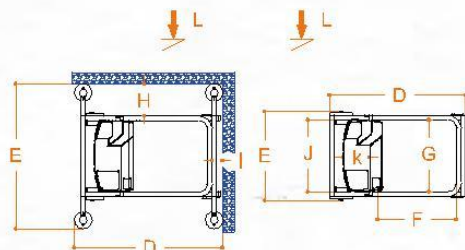

*Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

Distributed By

CHERRY PICKER
Ireland's Leading Supplier of Access Platforms



cherrypicker.ie



sales@cherrypicker.ie



353 (1) 835 4788



353 87 255 7755

TECHNICAL DATA