


Stock Picker 65E-MOVE

EXTENSIBLE SELF PROPELLED PLATFORMS

Light and easy to handle, the 65 EM, with its basket, which can be extended over 1 m, is the ideal solution for maintenance work and industrial assembly.

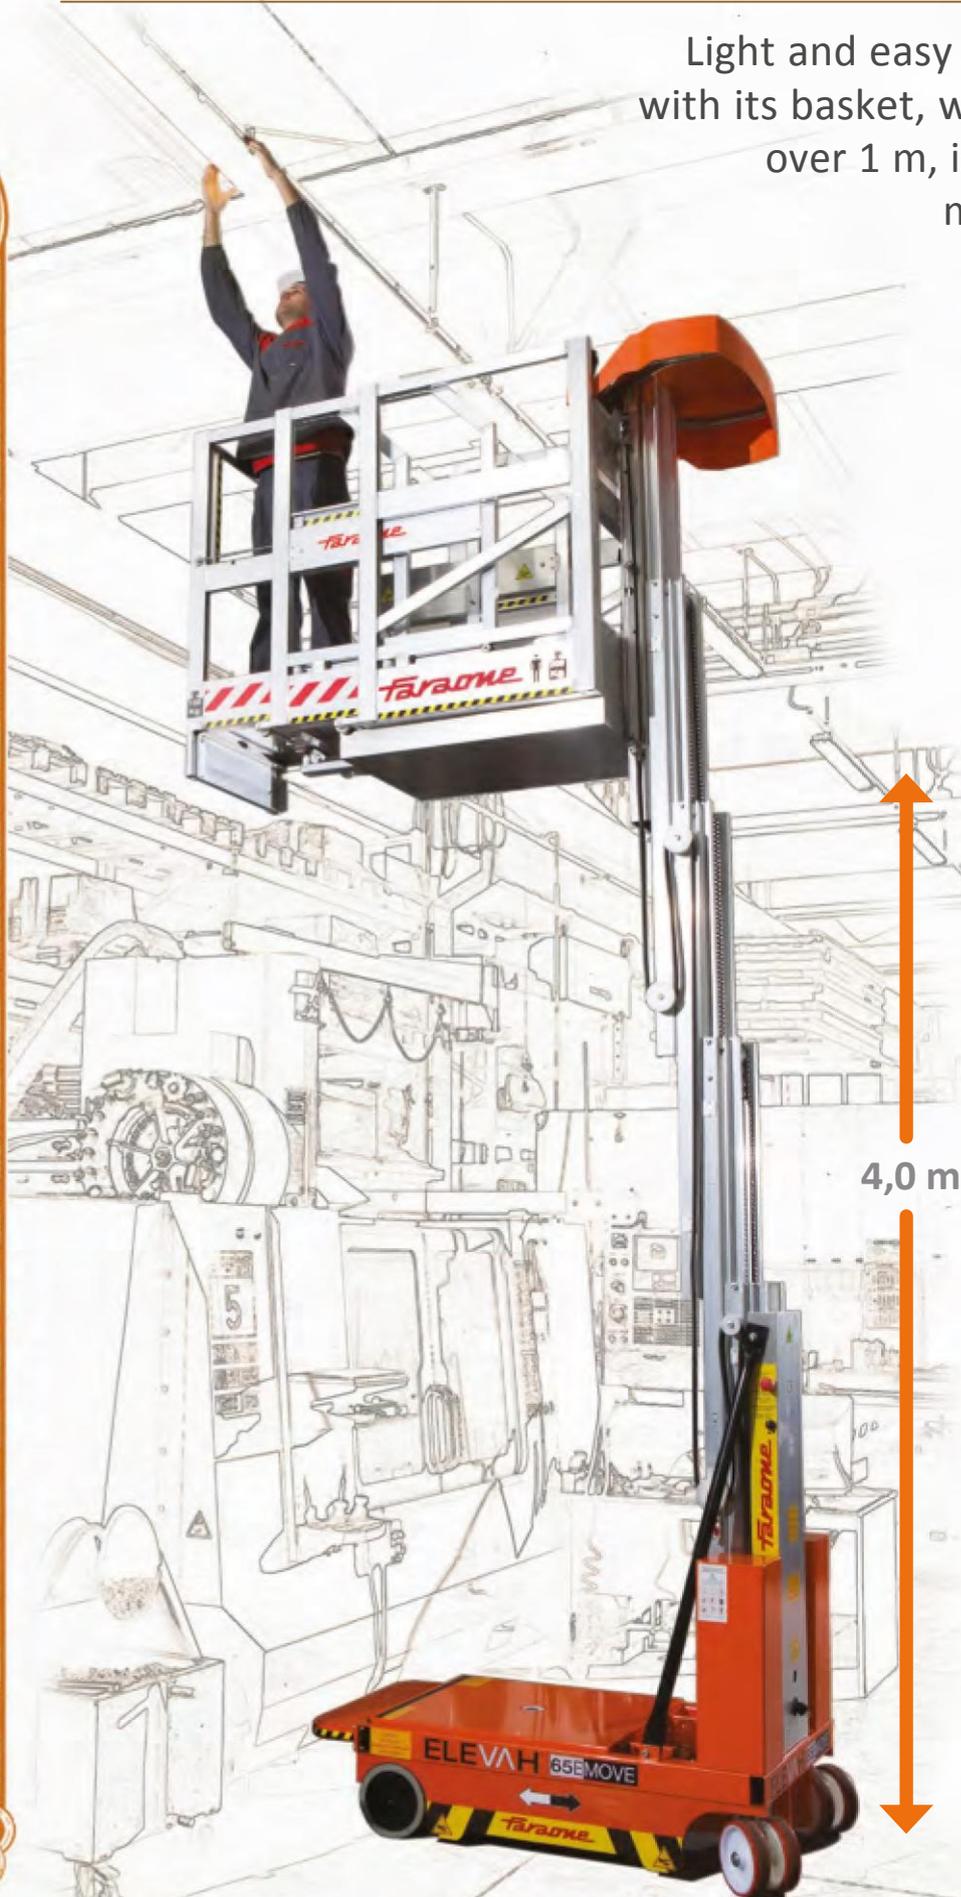

Convenient storage tray


4,0 m



## COMPACT AND VERSATILE

Its small size, its low weight (with columns and cage of aluminum) and its ability to overcome obstacles make it a unique machine in its category.

EXTENSIONS		
	A	B
Max m	3	1,63
Max m	4	1,10


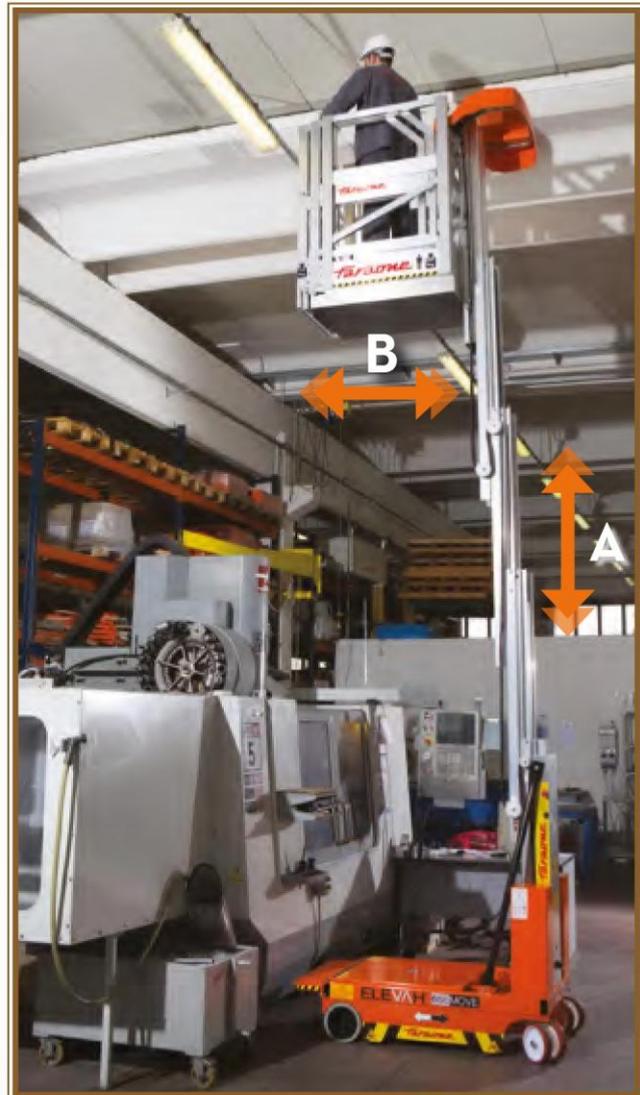


## IN SAFETY AND WITHOUT BARRIERS

The motorized extendable basket makes it easy to overcome any... varies according

### Technical data

<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		internal
<b>A</b>	<b>Closed machine height</b>	1720 mm
<b>B</b>	<b>Min. height from the ground to the platform level</b>	600 mm*
<b>C</b>	<b>Max. height from the ground to the platform level</b>	4850 mm
<b>D</b>	<b>Base overall dimensions</b>	1510 mm
<b>E</b>		2540 mm
<b>F</b>		780 mm
<b>G</b>	<b>Cage inner dimensions</b>	580 mm
<b>H</b>		980 mm
<b>I</b>		1500 mm
<b>J</b>		2020 mm
<b>K</b>	<b>Storage tray</b>	450 mm
<b>Capacity of storage tray</b>		20 kg
<b>Machine weight</b>		990 kg**
<b>Power supply</b>		24 V
<b>N° 2 12V Pb Acid Batteries</b>		105 Ah
<b>Battery charger</b>		110V - 220V
<b>Climbing ability at height</b>		2,5%
<b>L</b>	<b>Maximum climbing ability</b>	15%
<b>Drive wheels dimension</b>		Ø 220 x 65
<b>Swivel wheels dimensions</b>		Ø 200 x 45
<b>Turning radius</b>		1095 mm
<b>Maximum rising speed</b>		0,20 m/s
<b>Maximum descending speed</b>		0,20 m/s
<b>Maximum shifting speed</b>		0,70 m/s
<b>Maximum shifting speed at height</b>		0,25 m/s
<b>Max. elevation of self-propulsion when raised</b>		4850 mm
<b>M</b>	<b>Maximum pressure for wheel at full load</b>	4,17 kN***
<b>Work cycles**** (with fresh batteries)</b>		100

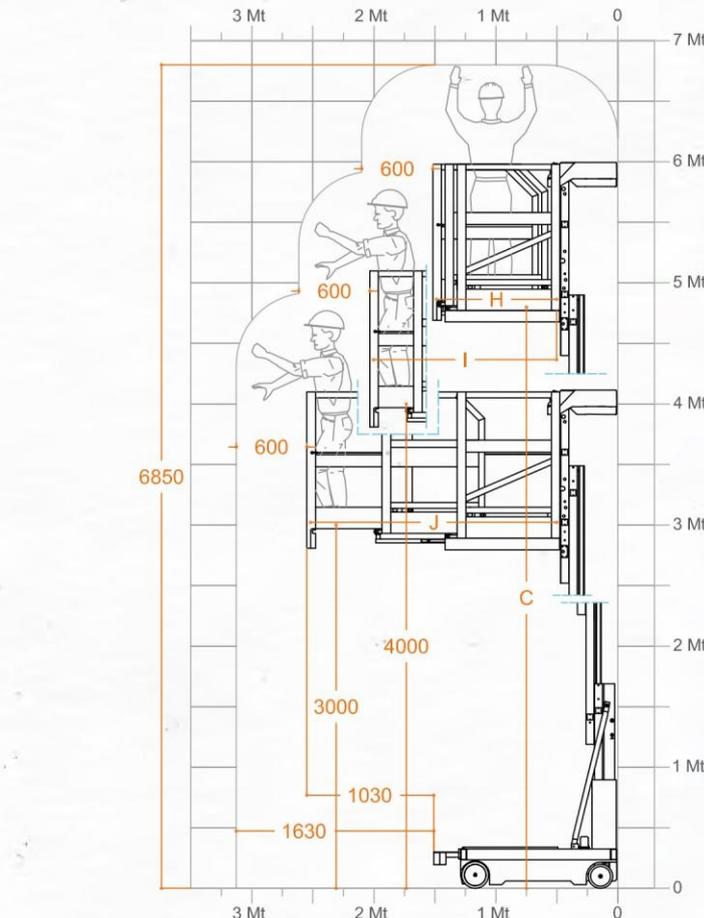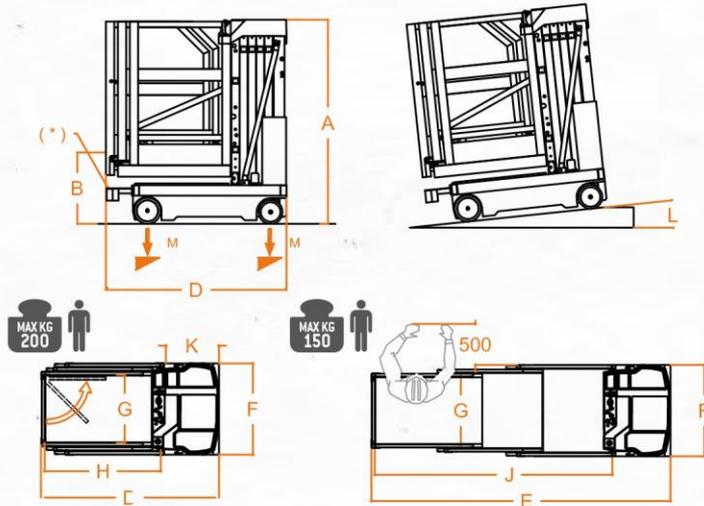

\* There is an intermediate step.

\*\* Inclusive of extensible picker.

\*\*\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\*\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.