

The 65 MP is a truck which can reach a working height of 6.5 m and is able to move around easily even in very small spaces.

It is indispensable for picking work in warehouses or supermarket

65MOVEPICKING

PICKINGTRUCKS



4.70 m





### DOUBLE PICKING PLATFORM

In addition to the large electric platform, which is height adjustable with a maximum payload capacity of 100 kg, there is a large fixed platform



### THE RIGHT SOLUTION.

#### THE COLUMNS AND CAGE ARE OF ALUMINIUM

Ideal for carrying out picking work up to a working height of 6.5 m so making the most of the height of the warehouse and optimizing costs.






### COMFORT AND SAFETY

Elevah 65 MP facilitates the operator's work, while ensuring the highest standards of safety.

### Technical data

<b>Max capacity</b>		200 kg
<b>Number of people</b>		1
<b>Use</b>		internal
<b>A</b>	Closed machine height	1720 mm
<b>B</b>	Min.height from the ground to the platform level	420 mm
<b>C</b>	Maximum height from the ground to the platform level	4700 mm
<b>D</b>	Base overall dimensions	1280 mm
<b>E</b>		1720 mm
<b>F</b>		780 mm
<b>G</b>	Cage inner dimensions	550 mm
<b>H</b>		700 mm
<b>I</b>	Picking platform	510 mm
<b>J</b>		720 mm
<b>K</b>	Storage tray	420 mm
<b>L</b>		720 mm
<b>Capacity of storage tray</b>		20 kg
<b>Machine weight</b>		720 kg
<b>Power supply</b>		24 V
<b>N° 2 12V Pb Acid Batteries</b>		105 Ah
<b>Battery charger</b>		110V - 220V
<b>Climbing ability at height</b>		2,5%
<b>M</b>	Maximum climbing ability	15%
<b>Drive wheels dimension</b>		Ø 220 x 65
<b>Swivel wheels dimensions</b>		Ø 200 x 50
<b>Turning radius</b>		1095 mm
<b>Maximum rising speed</b>		0,2 m/s
<b>Maximum descending speed</b>		0,15 m/s
<b>Maximum shifting speed</b>		1,0 m/s
<b>Maximum shifting speed at height</b>		0,22 m/s
<b>Max. elevation of self-propulsion when raised</b>		C=4700 mm
<b>N</b>	Maximum pressure for wheel at full load	3,20 kN*
<b>Cicli di lavoro ** (con batterie cariche)</b>		130

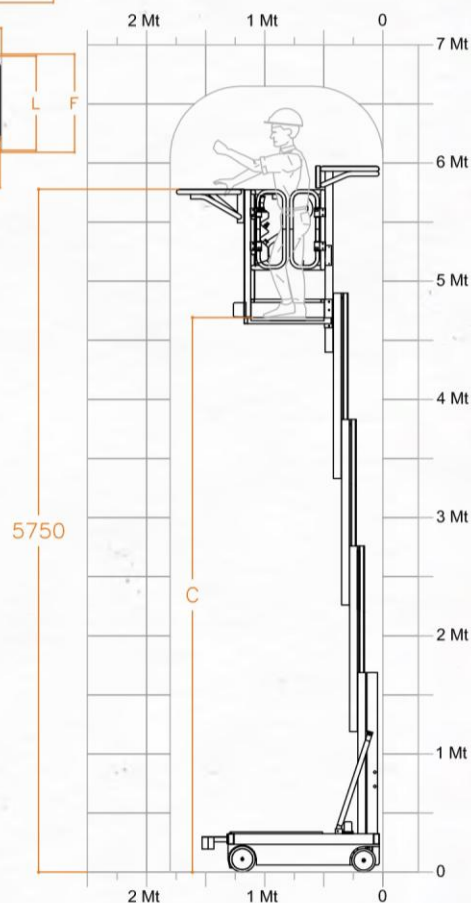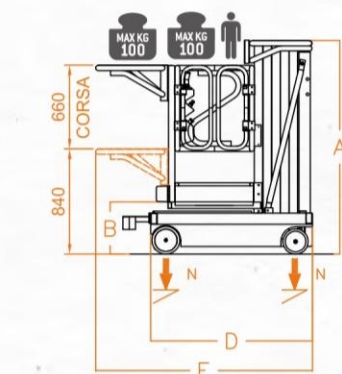

- \* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).
- \*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.

Distributed By

