




### Optimal productivity

- Continuous 360° turntable rotation
- Full proportional controls and simultaneous boom functions
- Lifts to full height in 44 seconds

### Outstanding rough terrain driving features

- 4 wheel steer and 4 wheel drive mean greater manoeuvrability
- Hydraulic differential
- lock 40cm ground clearance

### 10.6 m outreach provides a large working envelope

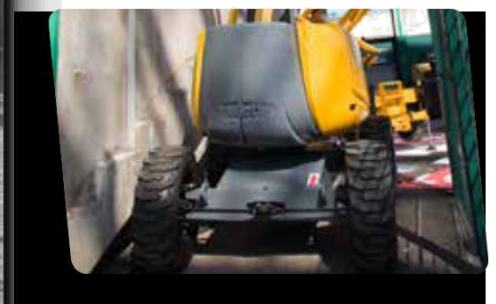



# HA18 PX

ROUGH TERRAIN ARTICULATING BOOMS




Cherry Picker Sales, Hire and MEWP Training

## TECHNICAL DATA

### HA18 PX

Working height	17.2 m
Platform height	15.2 m
Horizontal outreach	10.6 m
Up and over clearance	6.6 m
Lift capacity	230 kg
<b>F x G</b> Platform size	1.8 x 0.8 m
<b>A</b> Length - stowed	7.6 m
Transport length	5.9 m
<b>B</b> Width	2.3 m
<b>C</b> Height - stowed	2.3 m
Transport height	2.6 m
Vertical jib rotation	140° (+70/-70)
Platform rotation	178° (+89/-89)
Turntable rotation	360°
Tailswing	0 m
<b>D</b> Wheelbase	2 m
<b>E</b> Ground clearance	40 cm
Tilt	5°
Drive speed	0.8 - 5.5 km/h
Gradeability	50 %
Turning radius - outside	3.75 m
Tires - foam-filled	385/65-22.5
Power source	31 kW - 42 hp
Hydraulic system capacity	100 l
Fuel tank capacity	75 l
Weight	8050 kg

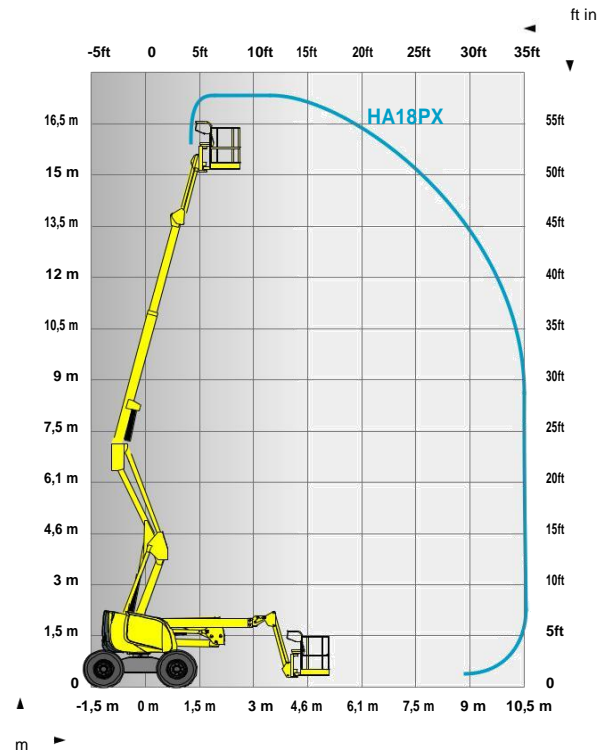

## STANDARD EQUIPMENT

- f 4 wheel drive and steer
- f Continuous 360° turntable
- f Safe to use in winds up to 60km/h
- f Swing out engine tray for ease of maintenance
- f 75 l fuel tank; 1.50 m filling height
- f 5° tilt alarm
- f 12 V battery / electrical control system
- f Auxiliary power in the platform for emergency descent
- f Brake release
- f Hourmeter
- f Slewing block pin
- f Towing hooks / lifting eyes

## OPTIONS AND ACCESSORIES

- f 4.1 kW on-board generator
- f Power to platform
- f Large basket 2.3 x 0.80 m (safe to use in winds up to 45 km/h – 28 mph).
- f Travel alarm
- f Rotating beacon
- f Working light
- f Catalytic exhaust
- f Biodegradable hydraulic oil
- f Cold Weather Package
- f Warm environment kit
- f Air line in platform

