


UpRight TL38 Specifications

Technical specifications:	TL38 Trailer Mounted Boom Lift
Max. working height	13.50m
Max. platform height	11.50m
Max. working height at full outreach	8.15m
Max. working outreach	5.60m
Jib length	1.20m
Platform width	1.20m
Platform depth	0.60m
Outrigger footprint	3.30m
Travel dimensions:	
Width	1.52m
Length	5.97m
Height	1.99m
Performance:	
Platform capacity	215Kg



cherrypicker.ie sales@cherrypicker.ie () 353 87 255 7755





Rotation (non-continuous)	370º
Tyres	185R13C 6ply radials 195RR14
Controls	One hand proprtional operating energy
	efficient motor control system
<u>Power:</u>	
Power source	24V DC motor
Battery	24V battery (4 x 6V 220Ah)
Weight:	
With hydraulic outriggers	1.490Kg
With manual outriggers	1.470Kg





cherrypicker.ie sales@cherrypicker.ie 🔇 353 87 255 7755



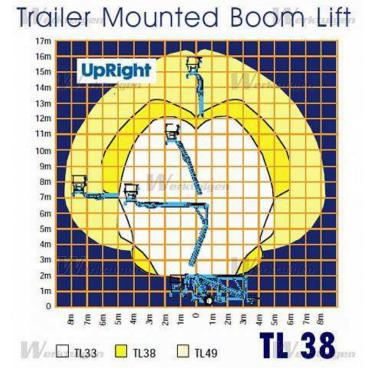

Trailer Mounted Boom Lift **TL 38** UpRight Werktulgen -1.52 m-1.99 m 5.97 m



cherrypicker.ie sales@cherrypicker.ie 🔇 353 87 255 7755

() 353 (1) 835 4788

5