



Specifications

Models	GR-26J	
Measurements	US	METRIC
Working height max. - indoor ⁽¹⁾	31 ft 11 in	9.90 m
Working height max. - outdoor ⁽¹⁾	31 ft 11 in	9.90 m
Platform height max.- indoor	25 ft 11 in	7.90 m
Platform height max. - outdoor	25 ft 11 in	7.90 m
Horizontal reach max.	8 ft 8 in	2.65 m
Working horizontal reach max.	10 ft 3 in	3.15 m
Up-and-over clearance max.	21 ft 10 in	6.70 m
A Platform length	2 ft 5.5 in	0.75 m
B Platform width	2 ft 11 in	0.90 m
Toeboard Height	6 in	15 cm
C Height - stowed	6 ft 6 in	1.99 m
D Length- stowed	9 ft 3 in	2.82 m
E Width	3 ft 3 in	0.99 m
F Wheelbase	3 ft 11 in	1.2 m
G Ground clearance (center)	4 in	10 cm

Productivity

Maximum platform occupancy (in/out)	2/1	
Lift capacity	440 lb	200 kg
Lift capacity - extension deck extended	300 lb	136 kg
Vertical jib rotation	140°	
Turntable rotation	350°	
Drive speed - stowed	2.8 mph	4.5 km/h
Drive speed - raised	0.4 mph	0.65 km/h
Gradeability ⁽²⁾	25%	
Turning radius - inside	1 ft 11 in	59 cm
Turning radius - outside	6 ft 10 in	2.08 m
Lifting speed - raise/lower	54/40 sec	
Controls - proportional	24V DC	
Tires - Solid non-marking	16×5×11.25 in	40.5 cm

Power

Power	24V (12×2V 250Ah)	
Hydraulic tank capacity	4.84 gal	22L



Weight⁽³⁾ and Floor Loading⁽⁴⁾

Weight	5,842 lb	2,650 kg
Tire load max.	3,273 lb	1,485 kg
Occupied floor pressure	420 psf	2,054 kg/m ²

Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 70 dBA	
Sound Pressure level (platform workstation)	< 70 dBA	
Vibrations	< 8 ft 2 in/s ²	< 2.5 m/s ²

Range of motion GR-26J

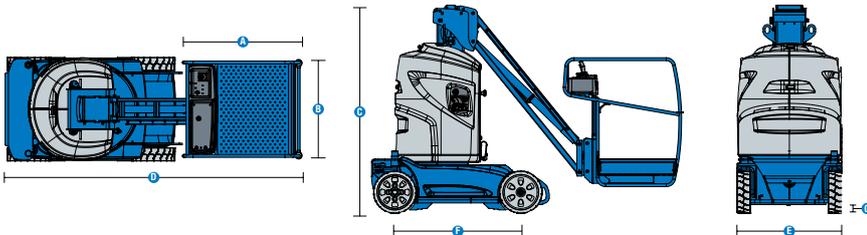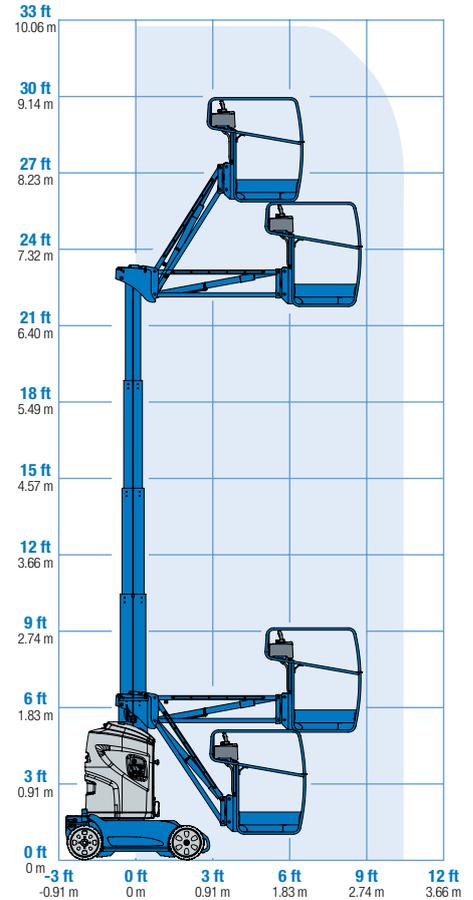

Genie® GR-26J

SKU: Standard Model

- GR-26J, 110V*
- **GR26J001C00001:** GR-26J, 220V

* Build to Order

Option availability		S	S+	BtO
Power	24V DC, twelve 2V batteries, 250Ah capacity	✓	✓	✓
	110V/50Hz			○
	220V/50Hz	✓	✓	✓
Platform	Steel sliding mid-rail platform	✓	✓	✓
	Steel tube-in-tube mast system	✓	✓	✓
	Plug and socket with RCBO		○	○
	Plug and socket, no RCBO		○	○
	Air line to platform			○
	AC power to platform		○	○
	Auxiliary platform lowering	✓	✓	✓
	Platform load sense system	✓	✓	✓
	Proportional lift and drive	✓	✓	✓
Chassis	Flashing beacon		○	○
	Descent, tilt, and motion alarm	✓	✓	✓
	Direct electric rear wheel drive	✓	✓	✓
	Drive enable system	✓	✓	✓
	Electric brake release	✓	✓	✓
	Fork pockets	✓	✓	✓
	Front wheel steer	✓	✓	✓
	Hour meter	✓	✓	✓
	On-board diagnostic system with battery charge indicator	✓	✓	✓
	Pothole protection	✓	✓	✓
	Reinforced ABS chassis covers	✓	✓	✓
	Solid non-marking tires	✓	✓	✓
	Tie-down attachment points	✓	✓	✓

- S Standard
- S+ Standard +
- BtO Build to Order
- ✓ Standard Features
- Options



Indoor & Outdoor



Narrow Access



Proportional lift and drive



CHERRY PICKER . IE

Sales & Service
 Bespoke Design
 MEWP Training
 Handling Solutions