

Specifications

| Models | GS-2032 | | GS-2632 | | GS-3232 | |
|---|---------|-------------|---------|-------------|---------|--------------|
| Measurements | Metric | US | Metric | US | Metric | US |
| Working height maximum* | 7.90 m | 25 ft 11 in | 9.80 m | 32 ft 1 in | 11.50 m | 37 ft 8 in |
| A Platform height maximum w/load sense | 5.90 m | 19 ft 5 in | 7.80 m | 25 ft 6 in | 9.50 m | 31 ft 4 in |
| B Platform height stowed | 1.03 m | 3 ft 4.5 in | 1.16 m | 3 ft 9.5 in | 1.29 m | 4 ft 2.75 in |
| A Platform length - outside | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in |
| extended | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in |
| Slide-out platform extension deck | 91 cm | 3 ft | 91 cm | 3 ft | 91 cm | 3 ft |
| D Platform width - outside | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in |
| Guardrail height | 1.10 m | 3 ft 7 in | 1.10 m | 3 ft 7 in | 1.10 m | 3 ft 7 in |
| Toeboard height | 15 cm | 6 in | 15 cm | 6 in | 15 cm | 6 in |
| A Height - stowed: folding guardrails | 2.13 m | 7 ft | 2.26 m | 7 ft 5 in | 2.39 m | 7 ft 10 in |
| rails folded | 1.78 m | 5 ft 9 in | 1.91 m | 6 ft 3 in | 2.03 m | 6 ft 8 in |
| Length - stowed | 2.44 m | 8 ft | 2.44 m | 8 ft | 2.44 m | 8 ft |
| F Length - extended | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in |
| G Width | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in | 81 cm | 2 ft 8 in |
| H Wheelbase | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in |
| A Ground clearance - center | 9.5 cm | 3.76 in | 9.5 cm | 3.76 in | 9.5 cm | 3.76 in |
| A - with pothole guards deployed | 2 cm | 0.75 in | 2 cm | 0.75 in | 2 cm | 0.75 in |

Productivity

| | | | | | | |
|--|------------------|--------------|------------------|--------------|------------------|--------------|
| Maximum platform occupancy (in/out) ¹ | 2/1 | 2/1 | 2/- | 2/- | 2/- | 2/- |
| Lift capacity | 363 kg | 800 lbs | 227 kg | 500 lbs | 227 kg | 500 lbs |
| Drive speed - full height | | | | | | |
| Drive speed - stowed | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph |
| Drive speed - raised | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph |
| Gradeability - stowed** | 30% | | 25% | | 25% | |
| Max outrigger levelling: front to back | _____ | _____ | _____ | _____ | 3° | |
| Max outrigger levelling: side to side | _____ | _____ | _____ | _____ | 5° | |
| Turning radius - inside | zero | zero | zero | zero | zero | zero |
| Turning radius - outside | 2.13 m | 7 ft | 2.13 m | 7 ft | 2.13 m | 7 ft |
| Raise / lower speed | 30 / 34 sec | 30 / 34 sec | 30 / 40 sec | 30 / 40 sec | 57 / 40 sec | 57 / 40 sec |
| Controls | proportional | | proportional | | proportional | |
| Drive | dual front wheel | | dual front wheel | | dual front wheel | |
| Multiple disc brakes | dual rear wheel | | dual rear wheel | | dual rear wheel | |
| Tyres - solid non-marking | 38 x13 x28 cm | 15 x5 x11 in | 38 x13 x28 cm | 15 x5 x11 in | 38 x13 x28 cm | 15 x5 x11 in |

Power

| | | | | | | |
|---------------------------|------------------------------------|----------|------------------------------------|----------|------------------------------------|----------|
| Power source | 24 V DC (four 6V 225 Ah batteries) | | 24 V DC (four 6V 225 Ah batteries) | | 24 V DC (four 6V 225 Ah batteries) | |
| Hydraulic system capacity | 14.2 L | 3.75 gal | 14.2 L | 3.75 gal | 14.2 L | 3.75 gal |

Sound & Vibration Levels


| | | | | | | |
|---|-----------------------|---------------------------|-----------------------|---------------------------|-----------------------|---------------------------|
| Sound pressure level (ground workstation) | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA |
| Sound pressure level (platform workstation) | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA | <70 dBA |
| Vibration | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² | <2.5 m/s ² | <8 ft 2 in/s ² |

Weight***

| | | | | | | |
|--|----------|-----------|----------|-----------|----------|-----------|
| | 1,825 kg | 4,024 lbs | 1,956 kg | 4,313 lbs | 2,352 kg | 5,185 lbs |
|--|----------|-----------|----------|-----------|----------|-----------|

Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2013); 2004/108/EC (EMC); 2006/95/EC (LVD)

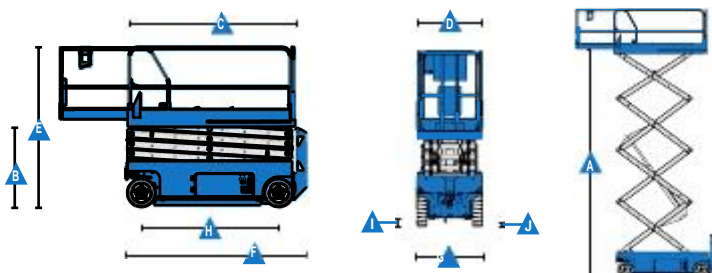

¹ Indoor use only for the GS-2632 and GS-3232

* The metric equivalent of working height adds 2 m to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.



Self-Propelled Scissor Lifts

GS™ -2032, GS-2632 & GS-3232

Features

Standard Features

Measurements

GS-2032

- 7.90 m (25 ft 11 in) working height
- Up to 363 kg (800 lbs) lift capacity

GS-2632

- 9.80 m (32 ft 1 in) working height
- Up to 227 kg (500 lbs) lift capacity

GS-3232

- 11.50 m (37 ft 8 in) working height
- Up to 227 kg (500 lbs) lift capacity

Productivity

- Folding rails with half-height swing gate
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Rear recessed charger receptacle
- Platform control with battery charge indicator
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Flashing beacons
- Electronic horn
- Hour meter
- Certified load sensor
- Telematics-Ready Connector

Power

- 24 V DC battery pack
- Universal 20 amp smart charger

Easily Configured To Meet Your Needs

Platform

- 2.26 x 0.81 m (7 ft 5 in x 2 ft 8 in) steel platform
- 0.91 m (3 ft) extension deck

Power

- 24 V DC (four 6 V 225 Ah batteries)

Outriggers

- Automatic levelling outriggers (on GS-3232 only, standard)
- No outriggers

Drive

- Dual front wheel drive

Tyres

- Solid non-marking

Options & Accessories

Productivity Options

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Biodegradable hydraulic oil⁽²⁾
- Track & Trace⁽¹⁾ (GPS unit providing machine location & operating information)
- Motion alarm package
- Automotive horn

Power Options

- Maintenance-free batteries
- Low temperature cut-out module⁽³⁾



⁽¹⁾ Includes a first 2 years subscription

⁽²⁾ Available on selected models only. See your Genie representative for further information.

⁽³⁾ For outdoor models only - not necessary for indoor models.

03/16 Part No. B109378UK

Distributed By

CHERRY PICKER 
Ireland's Leading Supplier of Access Platforms



cherrypicker.ie



sales@cherrypicker.ie



353 (1) 835 4788



353 87 255 7755

